



Probe Selection Guide

■ **More than 50 different probing solutions for wafer, package, and board level characterization.**

Cascade Microtech offers a wide selection of engineering probes to meet the highly demanding and broad range of on-wafer and signal integrity applications.

Our families of RF, mixed-signal and DC probes are designed to meet the many challenges of the various probing environments and provide a durable, high-performance product that exceeds expectations.



TABLE OF CONTENTS

Probe family overview.	3
Quick probe selection guides	
Probe Selection Guide: RF Probes.	5
Probe Selection Guide: Mixed-Signal Probes.	6
Probe Selection Guide: DC Multi-Contact Probes	7
Single and dual RF/microwave probes (coaxial and waveguide)	
Infinity Probes® – coaxial	9
Infinity Probes – waveguide	11
Air Coplanar Probes® (ACP) – coaxial and waveguide	13
 Z Probes®	16
RFIC and functional test (multi-contact) probes	
Multi-contact RF probes	
InfinityQuad™ Probes.	17
Unity Probes™.	18
ACP quadrant probes.	19
 Z Probes	20
Multi-contact DC probes	
Eye-Pass® probes	21
DCQ probes	22
WPH probes	22
Board test and signal integrity probes	
Fixed-pitch compliant probes (FPC).	23
Special-purpose RF/microwave probes	
Impedance matching probes.	24
High-performance quadrant probes	25
Cryogenic probes	25
Supporting accessories	
Impedance standard substrates (ISS).	26
Cables	26
WinCal XE™ RF calibration software	27

PROBE FAMILY OVERVIEW

Cascade Microtech offers a wide selection of engineering probes to meet the highly demanding and broad range of on-wafer and signal integrity applications. Our families of RF, mixed-signal and DC probes are designed to meet the many challenges of the various probing environments and provide a durable, high-performance product that exceeds expectations.




Infinity Probes

The Infinity Probe is an ideal match for device characterization and modeling and differential applications, with industry-leading performance. The Infinity Probe provides unmatched performance in both single-signal and dual-signal (differential) applications, providing extremely low contact resistance on aluminum pads with unsurpassed RF measurement accuracy for highly reliable, repeatable measurements. The Infinity Probe is designed for on-wafer/planar surface work only. Proprietary thin-film and coaxial probe technology reduces unwanted couplings to nearby devices and transmission modes. [\[page 9\]](#)



Air Coplanar Probes

The Air Coplanar Probe (ACP) is a rugged microwave probe with a compliant tip for accurate, repeatable measurements for both on-wafer as well signal integrity applications. It features excellent probe-tip visibility and the lowest loss available. Configurations for both single and dual signal applications are available. The ACP probe combines outstanding electrical performance with precise probe mechanics and is today's most widely used microwave probe available. [\[page 13\]](#)



|Z| Probes

The |Z| Probes assure long probe lifetime and accurate measurements with superior tip compliance. The RF/Microwave signal makes only one transition to the coplanar contact structure within the shielded, air-isolated probe body maintaining signal integrity over a temperature range from 10 K to 300°C.

[\[page 16\]](#)




RFIC and Functional Test (multi-contact) Probes

Cascade Microtech offers a variety of durable, high-performance mixed-signal multi-contact probes to streamline RFIC engineering test and production applications up to 110 GHz. The multi-contact probe families include InfinityQuad Probe, Multi |Z| Probe, Unity Probe, ACP RF quadrant probe, Eye-Pass probe, DCQ and WPH probes. [\[page 17\]](#)



Board Test and Signal Integrity Probes

Cascade Microtech offers precision, durable fine-pitch probes, ideal for signal integrity probing on IC packages and circuit board work. Many of these probes allow for deep reach capabilities to access contacts over adjacent components. Probes are available to meet the performance requirements of both circuit work or material characterization. [\(page 23\)](#)

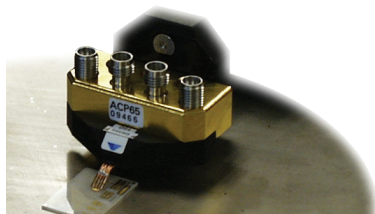

Special-purpose RF/microwave Probes

Cascade Microtech offers many custom probes, so if an exact match is not found in this guide, please contact us for a review to determine if we have a probe that will fit your requirements or if we can customize a probe to fit your application.

Some example applications/probes are [\(page 25\)](#):

- Impedance matching probe
- High-performance quadrant probe
- Cryogenic probe



Production Probe Cards for Parametric and Functional Test

Pyramid Probe® cards are rugged, robust, and well suited for the rigors of high-performance production wafer sort. Industry-leading signal integrity and mechanical alignment capabilities make these probe cards the perfect fit for multi-die testing for RF wireless, millimeter wave, RF, and high-speed digital in SiPs, SoCs, and leading edge DC and RF Parametric testing. Pyramid probe cards are not specifically covered in this guide. Please visit the Production Probes section on the Cascade Microtech website or contact a local sales representative for information on Pyramid Probe cards.

Quick Probe Selection Guide: RF Probes

Key Specifications			Z Probes		Infinity			ACP		
			Single	Dual	Single	Dual	Waveguide	Single	Dual	Waveguide
Maximum Frequency			67 GHz	50 GHz	110 GHz	110 GHz	500 GHz	110 GHz	110 GHz	140 GHz
Minimum Pad Size			50x50 μm	50x50 μm	25x35 μm	25x35 μm	25x35 μm	80x80 μm	80x80 μm	80x80 μm
Typical Raw Insertion Loss @ 40 GHz			0.8 dB	0.8 dB	0.7 dB	0.9 dB	NS	1.0/0.6 dB³	1.25 dB	NS
Compliance			50/300 μm¹	50 μm	1 μm	1 μm	1 μm	25 μm	25 μm	25 μm
Standard Pitch Range			50-1250 μm	100-500 μm	50-250 μm	100-250 μm	50-150 μm	100-1250 μm	100-500 μm	100-250 μm
Maximum DC Current			1.5 A	1.5 A	0.5/2 A⁴	0.5 A	0.5 A	5 A	5 A	0.5 A
Maximum RF Power @ 2 GHz			15/65 W²	15 W	37 dBm	37 dBm	NS	30 W	30 W	NS
Typical Lifetime on Al Pads			>1,000,000	>1,000,000	>250,000	>250,000	>250,000	>500,000	>500,000	>500,000
Maximum Temperature			300°C	200°C	125°C	125°C	125°C	200°C	200°C	200° C
Typical Contact Resistance on Al			50 mΩ	50 mΩ	30 mΩ	30 mΩ	30 mΩ	100 mΩ	100 mΩ	100 mΩ
Device Modeling and Characterization - Si	2-Port S-Parameter Measurements	DC-67 GHz	<div></div>	NR	<div></div>	NR	NR	<div></div>	NR	NR
		67-110 GHz	NR	NR	<div></div>	NR	NR	<div></div>	NR	NR
		110-500 GHz	NR	NR	NR	NR	<div></div>	NR	NR	NR
	Differential S-Parameter Measurements	DC-67 GHz	NR	<div></div>	NR	<div></div>	NR	NR	<div></div>	NR
		67-110 GHz	NR	NR	NR	<div></div>	NR	NR	<div></div>	NR
	Load-Pull Measurements	DC-67 GHz	<div></div>	NR	<div></div>	NR	NR	<div></div>	NR	NR
		67-110 GHz	NR	NR	<div></div>	NR	<div></div>	<div></div>	NR	<div></div>
		110-500 GHz	NR	NR	NR	NR	<div></div>	NR	NR	to 140 GHz
	Device Modeling and Characterization - GaAs	2-Port S-Parameter Measurements	DC-67 GHz	<div></div>	NR	<div></div>	NR	NR	<div></div>	NR
67-110 GHz			NR	NR	<div></div>	NR	NR	<div></div>	NR	NR
110-500 GHz			NR	NR	NR	NR	<div></div>	NR	NR	NR
Differential S-Parameter Measurements		DC-67 GHz	NR	<div></div>	NR	<div></div>	NR	NR	<div></div>	NR
		67-110 GHz	NR	NR	NR	<div></div>	NR	NR	<div></div>	NR
Load-Pull Measurements		DC-67 GHz	<div></div>	NR	<div></div>	NR	NR	<div></div>	NR	NR
		67-110 GHz	NR	NR	<div></div>	NR	NR	<div></div>	NR	WG 50-110 GHz
		110-500 GHz	NR	NR	NR	NR	140-500 GHz	NR	NR	WG 110-140 GHz
Production Testing - RF Discrete Devices		Al Pads	DC-67 GHz	<div></div>	For multi-port	<div></div>	<div></div>	NR	NR	NR
	67-110 GHz		NR	NR	<div></div>	For multi-port	NR	NR	NR	NR
	110-500 GHz		NR	NR	NR	NR	<div></div>	NR	NR	NR
	Au Pads	DC-67 GHz	<div></div>	For multi-port	<div></div>	<div></div>	NR	<div></div>	<div></div>	NR
		67-110 GHz	NR	NR	<div></div>	<div></div>	NR	<div></div>	For multi-port	NR
		110-500 GHz	NR	NR	NR	NR	<div></div>	NR	NR	WG 110-140 GHz
PCB Board Test	Single Signal	DC-67 GHz	<div></div>	NR	NR	NR	NR	<div></div>	NR	NR
		67-110 GHz	NR	NR	NR	NR	NR	<div></div>	NR	NR
		110-500 GHz	NR	NR	NR	NR	NR	NR	NR	WG 110-140 GHz
	Multi-port/Differential	DC-67 GHz	NR	<div></div>	NR	NR	NR	NR	<div></div>	NR
		67-110 GHz	NR	NR	NR	NR	NR	NR	<div></div>	NR

¹ For |Z| Probe PCB

² For high-power |Z| Probe

³ For low-loss ACP probe

⁴ For high-current Infinity Probe



= Best (Recommended)



= Good



= Acceptable

NR = Not Recommended

Quick Probe Selection Guide: Mixed-Signal / Multi-Contact Probes

Key Features				InfinityQuad	Multi Z	Unity	ACP-Q	Z Probe HF ProbeWedge™
Maximum Number Contacts				25	35	12	16	12
Maximum Frequency				110 GHz	20 GHz	20 GHz	110 GHz	67 GHz
Maximum Number RF Signals				25	16	8	3	2
Smallest Pad Size				30x50 µm	60x60 µm	95x95 µm	80x80 µm	80x80 µm
Power De-coupling				Eye-Pass	On-board	Eye-Pass	On-Tip	On-Tip
Non-Uniform Pitch				No	Yes	No	Yes	Yes
Maximum Temperature				125°C	200°C	125°C	125°C	125°C
Online Design Capture				Yes	No	Yes	No	No
IC Test Engineering	Characterization and Verification	Uniform Pitch	<20 GHz	●	●	●	○	○
			>20 GHz	●	NR	NR	○	○
		Non-Uniform Pitch	<20 GHz	NR	●	NR	●	●
			>20 GHz	NR	NR	NR	●	●
	Failure Analysis and Design Debug	Uniform Pitch	<20 GHz	●	●	●	○	○
			>20 GHz	●	NR	NR	○	○
		Non-Uniform Pitch	<20 GHz	NR	●	NR	●	●
			>20 GHz	NR	NR	NR	●	●
Production Test	Pre-Production	Uniform Pitch	<20 GHz	●	●	●	○	○
			>20 GHz	●	NR	NR	○	○
		Non-Uniform Pitch	<20 GHz	NR	●	NR	●	●
			>20 GHz	NR	NR	NR	●	●
	Small Scale Production	Uniform Pitch	<20 GHz	●	●	●	○	○
			>20 GHz	●	NR	NR	○	○
		Non-Uniform Pitch	<20 GHz	NR	●	NR	●	●
			>20 GHz	NR	NR	NR	●	●
	Large Scale Production	Uniform Pitch	<20 GHz	●	●	●	○	○
			>20 GHz	●	NR	NR	○	○
		Non-Uniform Pitch	<20 GHz	NR	●	NR	●	●
			>20 GHz	NR	NR	NR	●	●
Application Specific	Small Pads and Scribe-Street Devices	Uniform Pitch	<20 GHz	●	○	NR	NR	NR
			>20 GHz	●	NR	NR	NR	NR
		Non-Uniform Pitch	<20 GHz	NR	○	NR	NR	NR
			>20 GHz	NR	NR	NR	NR	NR
	mm-Wave Complex IC test (Wireless HDMI, Automobile Radar)	Uniform Pitch	—	●	NR	NR	●	NR
		Non-Uniform Pitch	—	NR	NR	NR	Recommend uniform pitch pads	NR
	PCB Board Test	Uniform Pitch	<20 GHz	NR	●	○	●	●
			>20 GHz	NR	NR	NR	●	●
		Non-Uniform Pitch	<20 GHz	NR	●	NR	●	●
			>20 GHz	NR	NR	NR	●	●
	Package Device Probing	Uniform Pitch	<20 GHz	NR	●	○	●	●
			>20 GHz	NR	NR	NR	●	●
		Non-Uniform Pitch	<20 GHz	NR	●	NR	●	●
			>20 GHz	NR	NR	NR	●	●

● = Best (Recommended) ● = Good ○ = Acceptable NR = Not Recommended

Quick Probe Selection Guide: DC Multi-Contact Probes

Key Features				Eye-Pass	DCQ	WPH-900	Multi Z	ProbeWedge WE	ProbeWedge WD
Maximum Number Contacts				12	16	12	35	16	40
Power De-coupling				Eye-Pass	On tip blade	On tip blade	On-board	On tip blade	On-board
Maximum Current				1 A	500 mA	500 mA	1 A	100 mA	100 mA
Maximum Voltage				50 V	50 V	50 V	100 V	50 V	50 V
RF Bandwidth				500 MHz	500 MHz	500 MHz	500 MHz	500 MHz	50 MHz
Contact Life				>250,000	>250,000	>250,000	>1,000,000	>250,000	>250,000
Smallest Pad Size				95x95 µm	80x80 µm	80x80 µm	60x60 µm	80x80 µm	80x80 µm
Non-Uniform Pitch				No	Yes	Yes	Yes	Yes	Yes
Maximum Temperature				125°C	125°C	125°C	200°C	125°C	125°C
Online Design Capture				Yes	No	No	No	No	No
IC Test Engineering	Simple IC Bias and Control	Uniform Pitch	<16 contacts						
			>16 contacts	NR	NR	NR		NR	
		Non-Uniform Pitch	<16 contacts	NR					
			>16 contacts	NR	NR	NR		NR	
	Characterization and Verification	Uniform Pitch	<16 contacts						
			>16 contacts	NR	NR	NR		NR	
		Non-Uniform Pitch	<16 contacts	NR					
			>16 contacts	NR	NR	NR		NR	
	Failure Analysis and Design Debug	Uniform Pitch	<16 contacts						
			>16 contacts	NR	NR	NR		NR	
		Non-Uniform Pitch	<16 contacts	NR					
			>16 contacts	NR	NR	NR		NR	
Production Test	Pre-Production	Uniform Pitch	<16 contacts						
			>16 contacts	NR	NR	NR		NR	
		Non-Uniform Pitch	<16 contacts	NR					
			>16 contacts	NR	NR	NR		NR	
	Small Scale Production	Uniform Pitch	<16 contacts						
			>16 contacts	NR	NR	NR		NR	
		Non-Uniform Pitch	<16 contacts	NR					
			>16 contacts	NR	NR	NR		NR	
	Large Scale Production	Uniform Pitch	<16 contacts						
			>16 contacts	NR	NR	NR		NR	
		Non-Uniform Pitch	<16 contacts	NR					
			>16 contacts	NR	NR	NR		NR	

= Best (Recommended) = Good = Acceptable NR = Not Recommended


QUICK SELECTION GUIDE: FREQUENCY RANGE AND PERFORMANCE

The best case or maximum frequency range achievable for any given probe is determined by its connector and cable types. Beyond this, the probe tip configuration and pitch are other primary attributes that further limit the usable frequency range. Note that single coaxial probes achieve the best RF performance with a GSG tip configuration and a tip pitch from 75 μ m to 250 μ m. Above 50 GHz, the optimum performance is achieved with a tip pitch from 100 μ m to 150 μ m. For dual coaxial probes, the optimum tip configuration is GSGSG and the same probe tip pitch ranges. Cascade Microtech recommends that consideration be given to testability when laying out the pad locations to attain optimum performance.


Connector (Max. frequency)	Probe Body Style	Probe
Gore 100 (20 GHz)	Unity probe	Unity Probe
2.92 mm/K(40 GHz) Compatible with SMA (20 GHz), 3.5 mm (26 GHz)	Vertical	i40 / ACP40
	Angled	i40-A / ACP40-A / Z Probe
2.4 mm (50 GHz)	Vertical	i50 / ACP50
	Angled and Low-loss version	i50-A / ACP50-A / Z Probe
1.85 mm (67 GHz)	Vertical	i67 / ACP65
	Angled and Low-loss version	i67-A / ACP65-A / Z Probe
1.0 mm (110 GHz)	Vertical	i110 / ACP110
	Angled	i110-A / ACP110- A

Notes:

- 1. Cascade Microtech probes use the 2.92 mm / K connector which is compatible with SMA and 3.5 mm, however it is recommended to use a 2.92 mm cable if possible.
- 2. ACQ probes use the corresponding connector and cable to match your frequency requirements, e.g., ACP-Q-50-xx-xx uses a RF probe with a 2.4 mm connector.
- 3. All probe RF connectors are female.

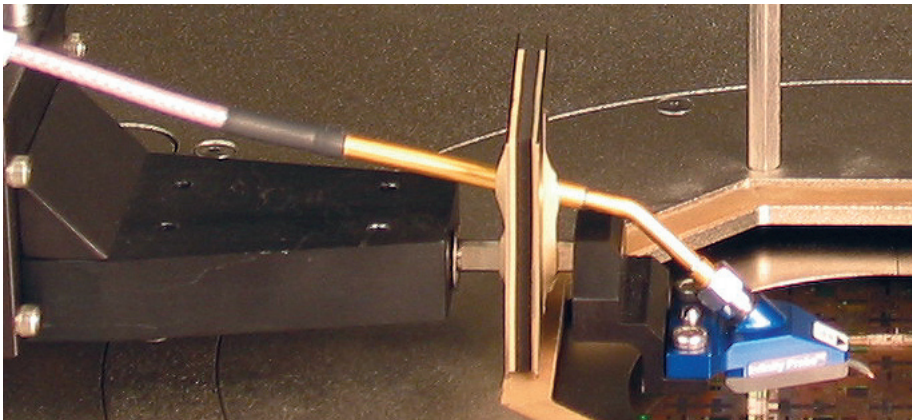

Angled probe body style

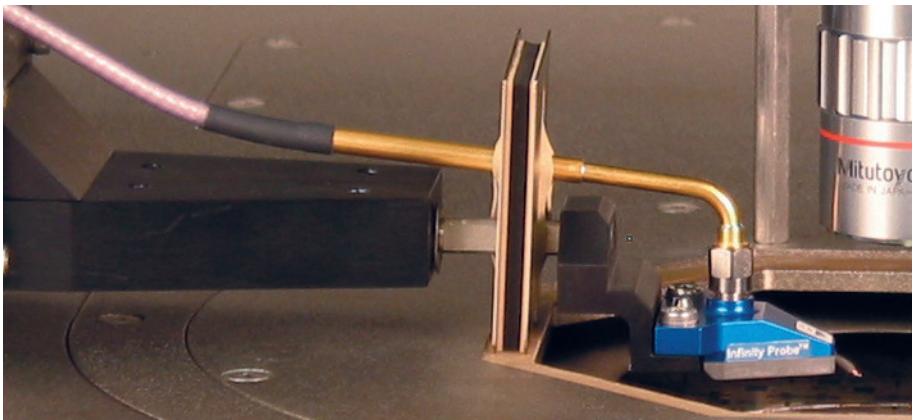

Vertical probe body style

INFINITY PROBES



High-frequency performance with low, stable contact resistance on aluminum pads


The Infinity Probe sets the benchmark for the device characterization and modeling community. This revolutionary probe combines extremely low contact resistance on aluminum pads with unsurpassed RF measurement accuracy to provide highly reliable, repeatable measurements. The Infinity Probe reaches this new performance level through the combination of Cascade Microtech's proprietary thin-film technology and coaxial probe technology.

Features


- Lithographic thin-film construction
- Excellent crosstalk characteristics
- Non-oxidizing nickel alloy tips
- Innovative force delivery mechanism
- 40 to 325 GHz versions
- GSG, SG/GS, GSGSG, GSSG, SGS configurations
- Probe pitch as narrow as 50 μm
- High current (2 A) version available

Advantages

- Superior field confinement reduces unwanted couplings to nearby devices and transmission modes
- Superior measurement accuracy and repeatability
- Small scrub minimizes damage to aluminum pad
- Typical contact resistance < 0.05 Ω on Al, < 0.02 Ω on Au
- Save valuable wafer space and reduce pad parasitics by being able to shrink pad geometries to 25 x 35 μm (best case)
- Reduction in modeling and design cycle time

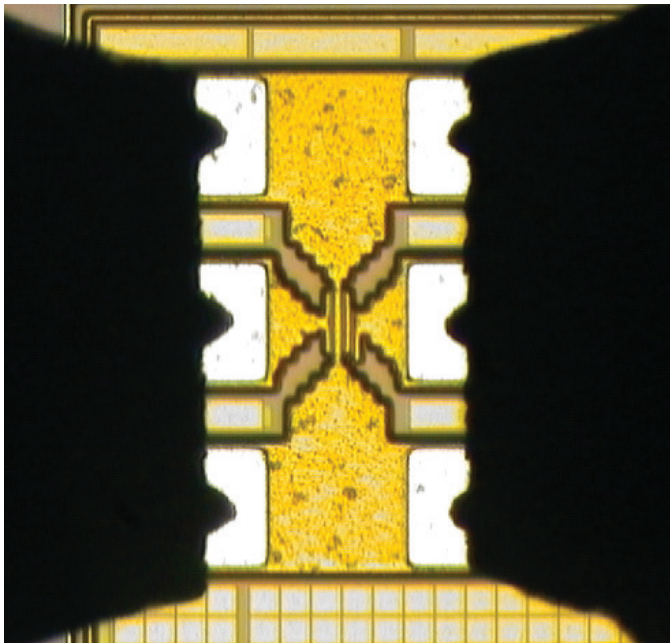

Excellent tip visibility Infinity Probe contacting Silicon RF device

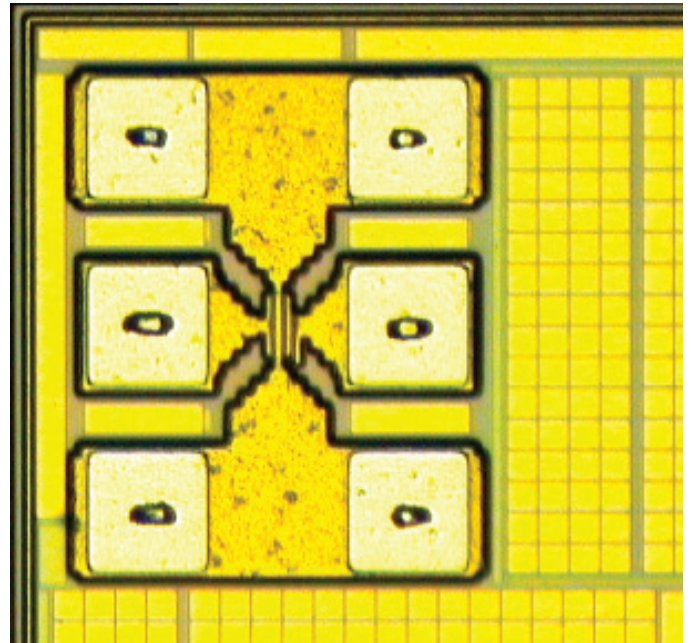

Small contact marks enable contact to small pads

INFINITY PROBES

Contact configuration	GSG, SG, GS	Connector	GSGSG, GSSG, SGS
Frequency range for coaxial probes	i40 – DC to 40 GHz i50 – DC to 50 GHz i67 – DC to 67 GHz i110 – DC to 110 GHz (GSG)	i40 - 2.92 mm (f) i50 - 2.4 mm (f) i67 - 1.85 mm (f) i110 - 1 mm (f)	i40 i50 i67 i110
Typical insertion loss (GSG, GSGSG versions only)			
DC to 40 GHz	0.7 dB		0.9 dB
40 to 50 GHz	0.8 dB		0.9 dB
50 to 67 GHz	1.1 dB		1.2 dB
67 to 110 GHz	1.4 dB		1.6 dB
Typical return loss (GSG, GSGSG versions only)			
DC to 40 GHz	20 dB		15 dB
40 to 50 GHz	17 dB		15 dB
50 to 67 GHz	16 dB		13 dB
67 to 110 GHz	14 dB		11 dB
Crosstalk	-50 dB @ 50 GHz		Typically -40 dB @ 40 GHz; GSGSG 150 Typically -25 dB @ 40 GHz ; GSSG 150
Electrical repeatability	-60 dB		-60 dB
Probe pitch (25 µm increments)	50 to 250 µm pitch (i40, i50 and i67) 50 to 150 µm pitch (i110)		100 to 250 µm pitch -
Recommended overtravel	75 µm		75 µm
Max safe overtravel	150 µm		150 µm
Contact life	> 500,000		> 500,000
Max. DC current	500 mA (2 A for -HC version)*		500 mA
Thermal range	-65 to 125°C		-65 to 125°C
Rc on aluminum (gold)	Typically < 0.05 Ω (< 0.02 Ω)		Typically < 0.05 Ω (< 0.02 Ω)
Rc variation during one 5-hour single contact cycle**	10 mΩ		10 mΩ
Min. probe pad size	25 x 35 µm (best case)		25 x 35 µm (best case)

*High current (2 A) version available up to 67 GHz (GSG only).

**Specifications applicable at 25°C operating temperature on clean aluminum.

Recommended Impedance Standard Substrates

Freq (GHz)	Config	Pitch	Part No.
DC to 40	GSG	100 to 250	101-190
DC to 50	GS/SG	100 to 250	103-726
DC to 67*	GSGSG, SGS	100 to 125	129-239
		150 to 225	129-240
		250	129-241
	GSSG	100 to 150	129-246
		200 to 250	129-247
DC to 110*	GSG	100 to 150	104-783
DC to 325*	GSG	50 to 75	138-356
DC to 325*	GSG	100 to 150	138-357

*Use of absorbing auxiliary chuck or absorbing ISS holder (p/n 116-344) recommended

Cables for Use with Infinity Probes

Freq (GHz)	Probe station	Body style	Length	Part number
DC to 40	Summit™ 11K/12K, S300	A	48 inch	132-423
		V	48 inch	132-420
	M150, RF-1,9K, no MicroChamber	A	48 inch	124-084-B
		V	48 inch	101-162-B
DC to 50	Summit 11K/12K, S300	A	48 inch	132-424
		V	48 inch	132-421
	M150, RF-1,9K, no MicroChamber	A	48 inch	124-085-B
		V	48 inch	103-202-B
DC to 67	Summit 11K/12K, S300	A	36 inch	132-425
		V	36 inch	132-422
	M150, RF-1,9K, no MicroChamber	A	36 inch	124-606-B
		V	36 inch	124-605-B
DC to 110	Summit 11K/12K, S300	A, V	18 cm	132-458
	Elite300™	A, V	24 cm	147-316

'A' denotes 45° angled coaxial connector body style.

'V' denotes vertical coaxial connector body style.

Dual Infinity probe is "V" style only.

WAVEGUIDE INFINITY PROBES

For each rectangular waveguide designation there are two different probe models.

The "T" models are designed to be compatible with Cascade Microtech's Summit 11000/12000, S300 and Elite 300 probing stations.

These models are also top-hat compatible when used with top hat PNs 116-441 and 115-164.

The "S" probe models are compatible with Cascade Microtech's 150mm probing stations.

All models are available without a bias tee.

For Elite300 version waveguide, consult with Cascade Microtech or your local representative for compatibility.

	Body style "T" (tall)	Body style "S" (short)
Waveguide designator (Frequency range)		
WR3 (220 to 325 GHz)	i325-T-GSG-xxx-BT	i325-S-GSG-xxx-BT
WR5 (140 to 220 GHz)	i220-T-GSG-xxx-BT	i220-S-GSG-xxx-BT
WR6 (110 to 170 GHz)	i170-T-GSG-xxx-BT	i170-S-GSG-xxx-BT
WR8 (90 to 140 GHz)	i140-T-GSG-xxx-BT	i140-S-GSG-xxx-BT
WR10 (75 to 110 GHz)	i110-T-GSG-xxx-BT	i110-S-GSG-xxx-BT
WR12 (60 to 90 GHz)	i90-T-GSG-xxx-BT	i90-S-GSG-xxx-BT
WR15 (50 to 75 GHz)	i75-T-GSG-xxx-BT	i75-S-GSG-xxx-BT
Typical insertion loss / return loss		
i325	6.2 dB / 13 dB	4 dB / 13 dB
i220	5.2 dB / 13 dB	4 dB / 13 dB
i170	4.7 dB / 13 dB	4 dB / 13 dB
i140	3.1 dB / 13 dB	3 dB / 13 dB
i110	2.6 dB / 13 dB	2 dB / 13 dB
i90	2.6 dB / 13 dB	2 dB / 13 dB
i75	2.1 dB / 13 dB	1.5 dB / 13 dB
Electrical repeatability	-60 dB	-60 dB
Probe pitch (25 µm increments)	50 to 100 µm (WR3, WR5, WR6, and WR8) 50 to 150 µm (WR10, WR12, and WR15)	50 to 100 µm (WR3, WR5, WR6, and WR8) 50 to 150 µm (WR10, WR12, and WR15)
Recommended overtravel	25 to 50 µm	25 to 50 µm
Maximum safe overtravel	100 µm	100 µm
Contact life	> 200,000	> 200,000
Maximum DC current	500 mA	500 mA
Thermal range	-65 to 125°C	-65 to 125°C
Rc on aluminum	Typically < 0.05Ω	Typically < 0.05Ω
Rc on gold	Typically < 0.02Ω	Typically < 0.02Ω
Rc variation during one 5-hour single contact cycle*	10 mΩ	10 mΩ
Minimum probe pad size	25 x 35 µm (best case)	25 x 35 µm (best case)

*Specifications applicable at 25°C operating temperature on clean aluminum.

Recommended Impedance Standard Substrates

Model	Config	Pitch	Part No.
WR3* WR5* WR6* WR8* WR10* WR12* WR15*	GSG	50 to 75 100 to 150	138-356 138-357

*Use of absorbing auxiliary chuck or absorbing ISS holder (p/n 116-344) recommended


Waveguide Sections for Use with Waveguide Infinity Probes

*For Elite 300 version waveguide, consult with Cascade Microtech for compatibility.


Waveguide "T" Model	Waveguide S-Bend section
WR3	147-309 [147-310 for Elite 300]
WR5	133-994
WR6	133-995
WR8	133-996
WR10	133-997
WR12	133-998
WR15	133-999

Waveguide "S" Model	Waveguide S-Bend section
WR3	144-399
WR5	133-988
WR6	133-989
WR8	133-990
WR10	133-991
WR12	133-992
WR15	133-993


INFINITY PROBES

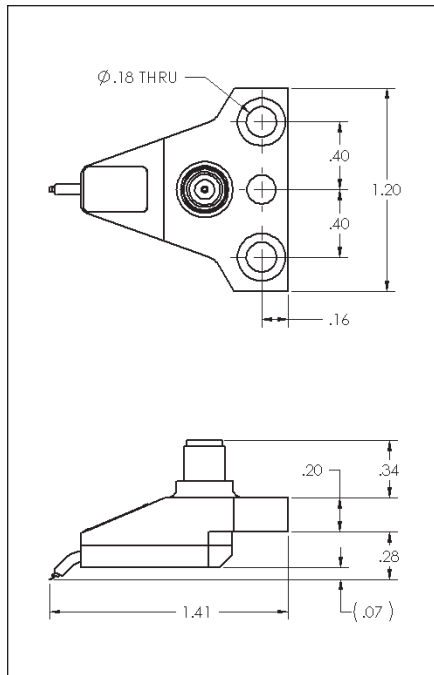



Infinity Probe, vertical body style

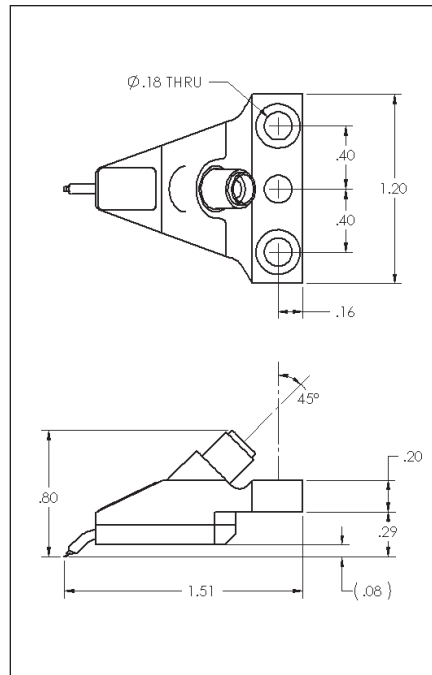



Infinity Probe, angled body style

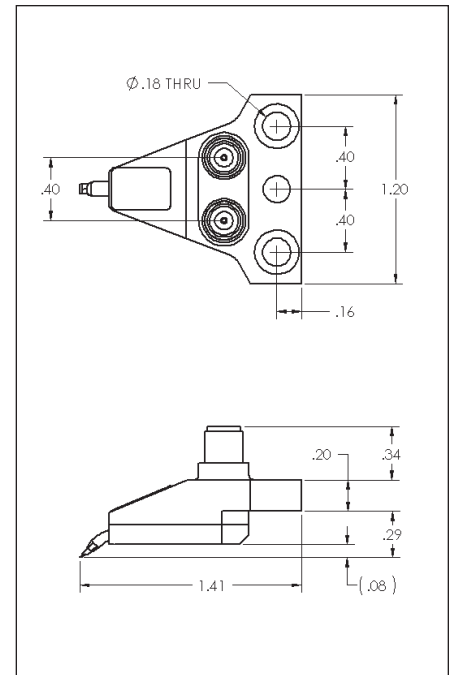

Dual Infinity Probe

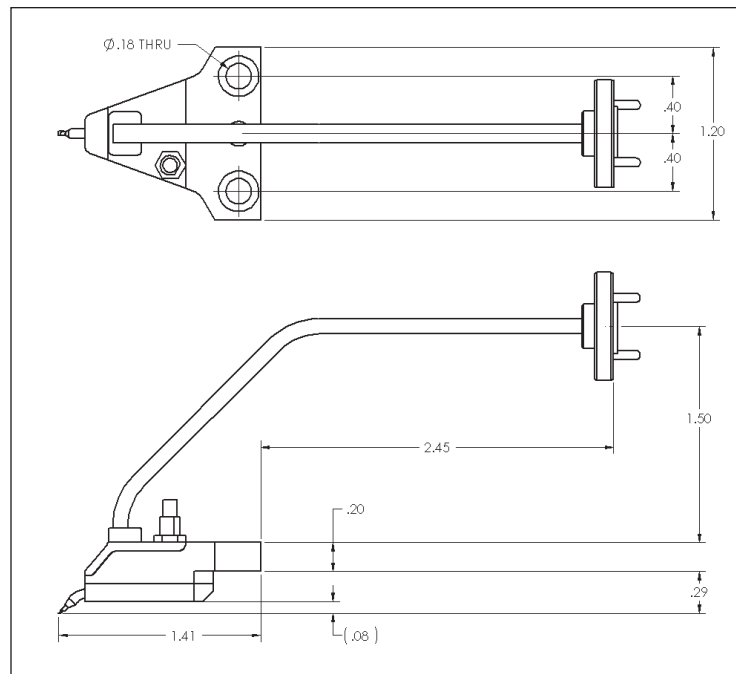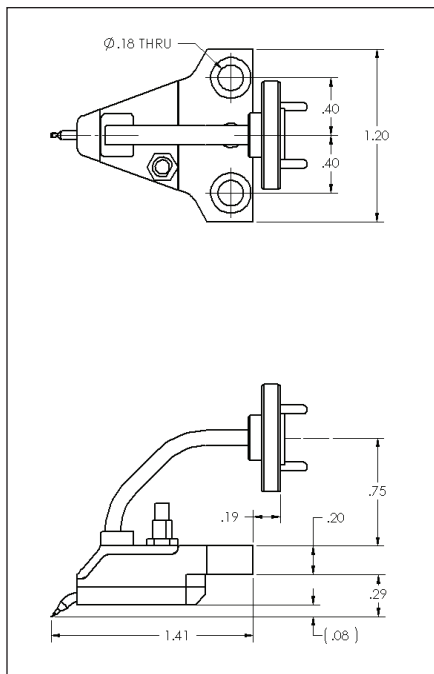


Waveguide Infinity Probe - "S" Model on the left, and "T" Model on the right

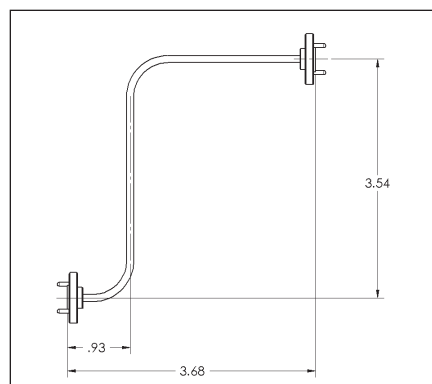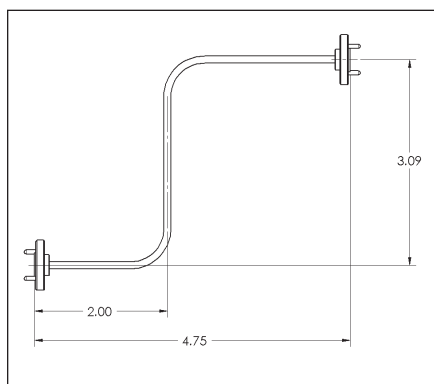

Waveguide S-Bend for Waveguide S & T models: left for 9k probe stations, right for Summit 11K/12K and S300 stations.

Note: Additional versions are available for the Elite300 probe station and for the i325 probe. Consult with factory for more information

AIR COPLANAR PROBES

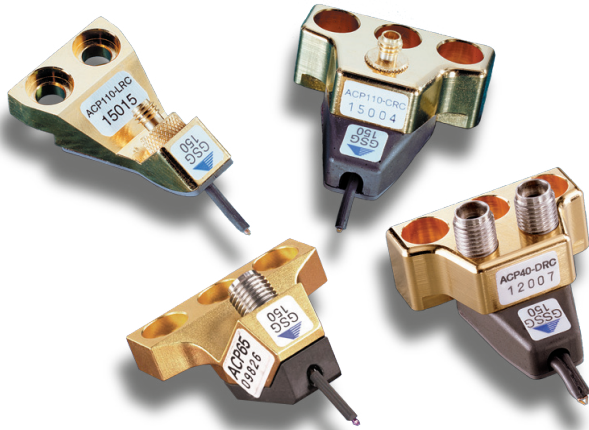

Features

- Unique Air Coplanar tip design
- DC to 110 GHz models available in single and dual line versions
- Low insertion and return loss with ultra-low-loss (-L) versions
- Excellent crosstalk characteristics
- Wide operating temperature -65°C to +200°C
- Wide range of pitches available up to 1250 μm
- Fast delivery available on 100, 125, 150, 200, and 250 μm pitched probes
- Individually supported contacts
- Choice of beryllium copper (BeCu) or tungsten tip material
- Reduced contact (RC) probe tips for small pads
- Precision tip dual configuration available
- BeCu tip provides rugged, repeatable contact on gold pads


Advantages

- Good visibility at probe tip allows accurate placement on DUT contact-pads
- Outstanding compliance for probing non-planar surfaces
- Stable and repeatable over-temperature measurements
- Typical probe life of 500,000 contacts on gold pads
- Reduction in development cycle time


RF and microwave on-wafer probes: long-lasting, rugged, ACP series

The Air Coplanar Probe was developed in response to the need for a rugged microwave probe with a compliant tip for accurate, repeatable measurements on-wafer. Air Coplanar Probes feature excellent probe-tip visibility and the lowest loss available. For measurements where pad area is at a premium, the ACP family is offered with a reduced contact (RC)* area probe tip. The ACP probe family also features dual signal line versions for differential and multiport measurements.

Combining outstanding electrical performance with precise probe mechanics, the ACP probe is the most widely used microwave probe available.

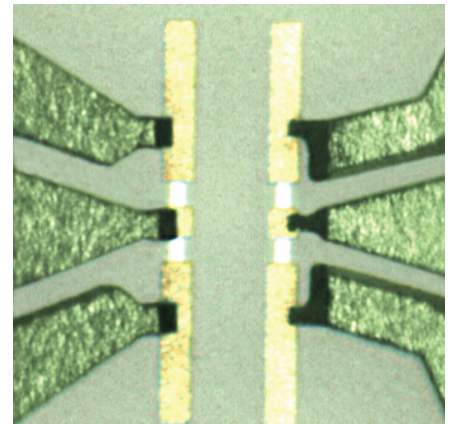

Standard ACP tip (left) versus reduced contact ACP tip (right)

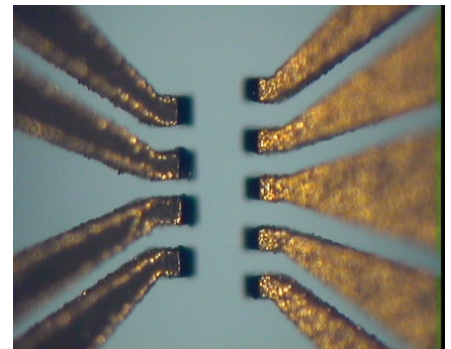

ACP-GSSG (left) vs. ACP-GSGSG (right)

*For pad sizes smaller than 80 μm , use reduced contact area (RC) tips.

AIR COPLANAR PROBES

	Probe head type	Part number (Note 1,2)	Insertion loss Max. (dB) (Note 12)	Max DC current*	Max RF power**	MicroChamber compatible	Connector	Recommended ISS	
								Standard (100 to 250 µm)	Wide pitch (250 to 1250 µm)
Single Coaxial	DC to 40 GHz (Notes 1, 2, 11)	ACP40-m-GS-xxx	2.0	5 A	6.5 W	Yes	2.92 mm (f)	103-726	106-683
		ACP40-m-SG-xxx	2.0	5 A	6.5 W	Yes		103-726	106-683
		ACP40-m-GSG-xxx	1.0	5 A	6.5 W	Yes		101-190	106-682
		ACP40-Am-GS-xxx	2.0	5 A	6.5 W	(Note 7)	2.92 mm (f)	103-726	106-683
		ACP40-Am-SG-xxx	2.0	5 A	6.5 W	(Note 7)		103-726	106-683
		ACP40-Am-GSG-xxx	1.0	5 A	6.5 W	(Note 7)		101-190	106-682
	DC to 50 GHz (Notes 1, 2, 11)	ACP40-Lm-GSG-xxx	0.6 (Note 6)	5 A	6.5 W	(Note 7)		101-190	106-682
		ACP50-m-GS-xxx	2.0 @ 40 GHz	5 A	5 W	Yes	2.4 mm (f)	103-726	
		ACP50-m-SG-xxx	2.0 @ 40 GHz	5 A	5 W	Yes		103-726	n/a
		ACP50-m-GSG-xxx	1.4	5 A	5 W	Yes		101-190	
		ACP50-Am-GS-xxx	2.0 @ 40 GHz	5 A	5 W	(Note 7)	2.4 mm (f)	103-726	
		ACP50-Am-SG-xxx	2.0 @ 40 GHz	5 A	5 W	(Note 7)		103-726	n/a
	DC to 65 GHz (Notes 1, 2, 11)	ACP50-Am-GSG-xxx	1.4	5 A	5 W	(Note 7)		101-190	
		ACP50-Lm-GSG-xxx	1.4	5 A	5 W	(Note 7)		101-190	
		ACP65-m-GS-xxx	2.0 @ 40 GHz	5 A	4 W	Yes	1.85 mm (f)	103-726 (Note 8)	
		ACP65-m-SG-xxx	2.0 @ 40 GHz	5 A	4 W	Yes		103-726 (Note 8)	n/a
		ACP65-m-GSG-xxx	2.0	5 A	4 W	Yes		101-190 (Note 8)	
		ACP65-Am-GS-xxx	2.0 @ 40 GHz	5 A	4 W	(Note 7)	1.85 mm (f)	103-726 (Note 8)	
	DC to 110 GHz (Notes 1, 2, 10, 11)	ACP65-Am-SG-xxx	2.0 @ 40 GHz	5 A	4 W	(Note 7)		103-726 (Note 8)	n/a
		ACP65-Am-GSG-xxx	2.0	5 A	4 W	(Note 7)		101-190 (Note 8)	
		ACP65-Lm-GSG-xxx	2.0	5 A	4 W	(Note 7)		101-190 (Note 8)	
		ACP110-Cm-GSG-xxx	1.25	5 A	2 W	Yes	1.0 mm (f)	104-783 (Note 8)	
		ACP110-Am-GSG-xxx	1.25	5 A	2 W	(Note 7)		104-783 (Note 8)	n/a
		ACP110-Lm-GSG-xxx	1.15	5 A	2 W	(Note 7)		104-783 (Note 8)	
Dual coaxial	DC to 110 GHz (Notes 1, 2, 3, 10)	ACPy-Dm-GSGSG-xxx	1.25 @ 40 GHz (Note 4)	5 A	2 W	Yes	User specified (Note 3)	See ISS list (page 26)	See ISS list (page 26)
		ACPy-Dm-GSGS-xxx	1.25 @ 18 GHz (Note 4)	5 A	2 W	Yes			
		ACPy-Dm-GSS-xxx	1.0 @ 10 GHz (Note 4,5)	5 A	2 W	Yes			
		ACPy-Dm-GSSG-xxx	1.0 @ 10 GHz (Notes 4)	5 A	2 W	Yes			
		ACPy-Dm-SGS-xxx	1.25 @ 18 GHz (Notes 4)	5 A	2 W	Yes			
		ACPy-Dm-SGSG-xxx	1.25 @ 18 GHz (Notes 4)	5 A	2 W	Yes			
Waveguide	50 to 75 GHz (Notes 1, 2, 10)	ACPy-Dm-SSG-xxx	1.0 @ 10 GHz (Notes 4,5)	5 A	2 W	Yes			
		ACP75-Sm-GSG-xxx	1.5	500 ma	4 W	No	WR-15	104-738 (Note 8)	n/a
	60 to 90 GHz (Notes 1, 2, 10)	ACP75-Tm-GSG-xxx	2.0	500 ma	4 W	Yes	WR-15		
		ACP90-Sm-GSG-xxx	2.0	500 ma	3 W	No	WR-12	104-738 (Note 8)	n/a
	75 to 110 GHz (Notes 1, 2, 10)	ACP90-Tm-GSG-xxx	2.5	500 ma	3 W	Yes	WR-12		
		ACP110-Sm-GSG-xxx	2.0	500 ma	2 W	No	WR-10	104-738 (Note 8)	n/a
	90 to 140 GHz (Notes 1, 2, 10)	ACP110-Tm-GSG-xxx	2.5	500 ma	2 W	Yes	WR-10		
		ACP140-Sm-GSG-xxx	2.5	500 ma	2 W	No	WR-8	138-356/357 (Note 8)	n/a
		ACP140-Tm-GSG-xxx	3.0	500 ma	2 W	Yes	WR-8		

*2.5 A for W tip, 5 A for BeCu tip, and 1 A for RC tip.

All specs are for probe and DUT at room temperature.

**Rated at highest probe frequency. Additionally each probe is capable of > 30W @ 2.4 GHz, > 10W @ 18 GHz, > 7.5W @ 26.5 GHz.


Notes:

- m** refers to the tip material. Delete for BeCu. Change to **W** for tungsten.
- xxx** refers to probe contact center to center spacing in microns, e.g. ACP40-GSG-150 is 150 µm. Contacts are on a constant pitch and width is approximately 50 µm.
- yy** refers to the connector type. 40 (2.92mm), 50 (2.4 mm), 65 (1.85 mm), 110 (1.0 mm).
- Insertion loss specification is for a 2.92mm connectorized probe.
- Signal furthest from ground is not specified.
- Low-loss probe insertion loss for pitches greater than 150 µm and less than or equal to 250 µm is 0.8 dB.
- Requires new larger top hat assembly.
- Use of 116-344 ISS absorber recommended.
- The convention for describing probe head footprints is the sequence of contacts as seen looking down on the probe head tip in its functional position, with the tip pointing away from the viewer, describing contacts from left to right.
- ACP probes, except 110 models, are available in a wide range of pitches from 50 µm to 1250 µm. Insertion loss and frequency performance applies to pitches from 100 to 250 µm, unless otherwise noted. ACP110 probes available in pitches from 100 to 150 µm; minimum pitch for ACP dual probes is 100 µm.
- Angled probes require the 114-592 probe mount for cable clearance.
- Electrical specifications apply to probe pitches of 100 to 250 µm, except for 90, 110 and 140 GHz probes, where the maximum pitch is 150 µm.


Part Numbers for Reduced Contact Probes

ACP Reduced Contact Probes are available in the same configurations and body styles as the regular ACP series. The standard available pitches are from 100 to 250 µm. Other pitches are available upon request. When ordering, add "**RC**" to the end of the regular ACP part number from the above, e.g. "ACP40-W-GSG-150**RC**"


AIR COPLANAR PROBES

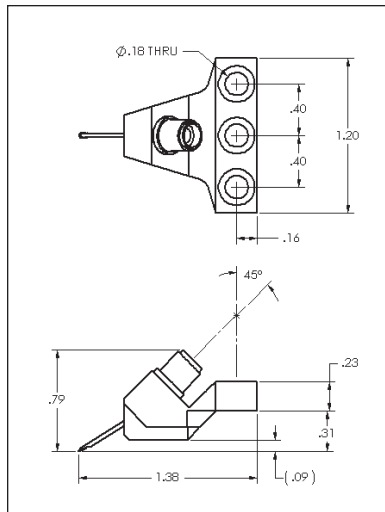


Probe style for: ACP40-Ax, ACP50-Ax, ACP65-Ax, ACP110-Ax.
Requires 114-592 probe mount.

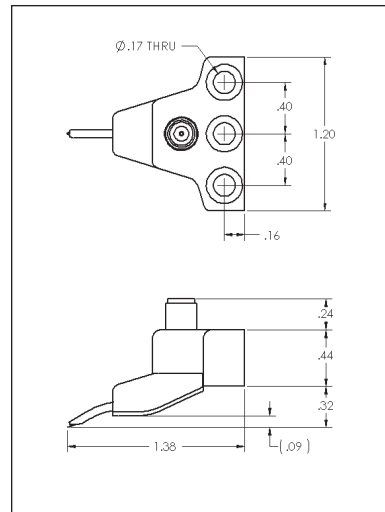


Probe style for: ACP40-x, ACP50-x, ACP65-x, ACP110-Cx.

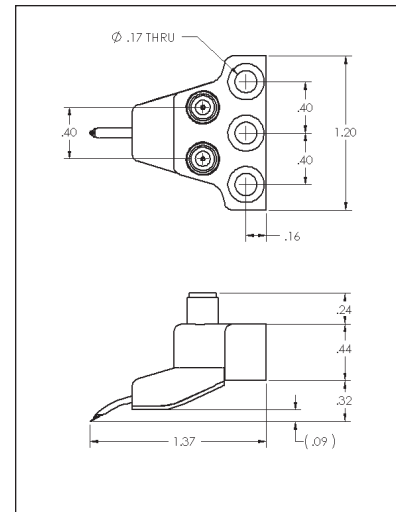


Probe style for: ACP40-Dx, ACP50-Dx, ACP65-Dx, ACP110-Dx.

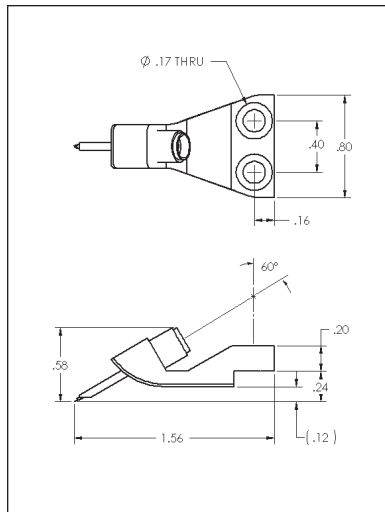

Probe style for: ACP40-Lx, ACP50-Lx, ACP65-Lx, ACP110-Lx.

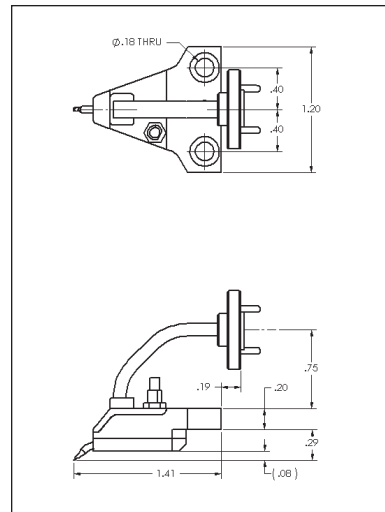

Waveguide ACP Probe - "S" Model on the left, and "T" Model on the right.

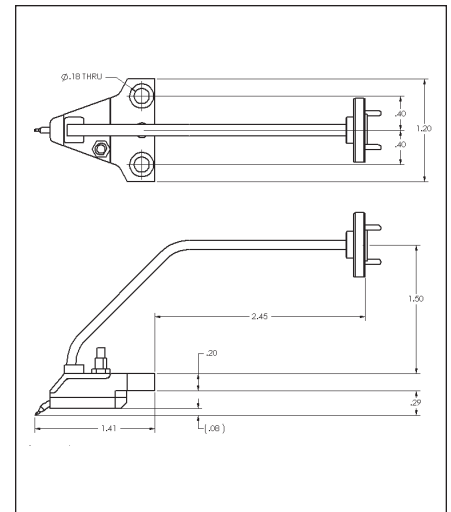

Cables for Use with Air Coplanar Probes


Freq (GHz)	Probe station	Body style	Length (inch)	Part number
DC to 40	Summit 11K/12K, S300	A	48 inch	132-423
		V	48 inch	132-420
	M150, RF-1,9K, no MicroChamber	A	48 inch	124-084-B
		V	48 inch	101-162-B
DC to 50	Summit 11K/12K, S300	A	48 inch	132-424
		V	48 inch	132-421
	M150, RF-1,9K, no MicroChamber	A	48 inch	124-085-B
		V	48 inch	103-202-B
DC to 65	Summit 11K/12K, S300	A	36 inch	132-425
		V	36 inch	132-422
	M150, RF-1,9K, no MicroChamber	A	36 inch	124-606-B
		V	36 inch	124-605-B
DC to 110	Summit 11K/12K, S300	A, V	18 cm	132-458

'A' denotes 45° angled coaxial connector body style.

'V' denotes vertical coaxial connector body style.

For waveguide sections and cables for Elite300, consult with Cascade Microtech or your local representative for compatibility.

|Z| PROBES

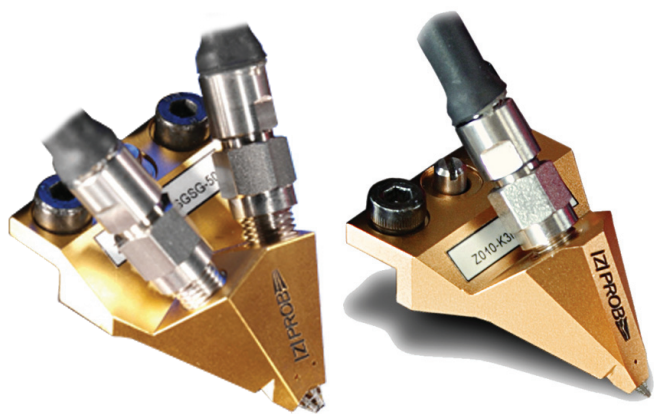


|Z| Probes for RF/Microwave Applications

Excellent performance over a temperature range from 10 K to 300°C with the long life time
Durable |Z| Probes enable easy and repeatable contacts to DUTs. Its robust design of the coplanar contact structure ensures long probe life time. The probe tips can move independently of one another, enabling probing of pad-height deviation of up to 50 µm.


Features

- Long life time (typically > 1,000,000 touchdowns on Al pads)
- Independent, long contact springs to overcome pad height differences up to 50 µm
- Excellent performance in vacuum environments and in a wide temperature range (from 10 K to 300°C)
- High impedance control with perfectly-symmetrical coplanar contact structure, eliminating signal distortion

Probe Type	Frequency	Connector	Configuration	Pitch	Application
Z Probe	DC – 67 GHz	1.85mm (f)	GSG, GS, SG	50 - 1250 µm	Single-port RF
Dual Z Probe	DC – 50 GHz	2.4mm (f)	GSGSG, GSSG, SGS	100 - 500 µm	Multi-port/differential
Z Probe Power	DC – 40 GHz	2.92mm (f)	GSG	100 - 500 µm	High power/low loss
Z Probe PCB	DC – 20 GHz	2.92mm (f)	GSG, GS, SG	500 - 2500 µm	PCB, IC pins and ceramic substrate probing

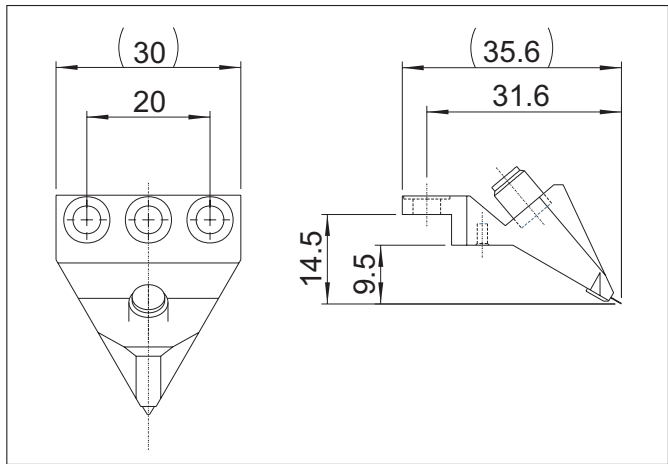

Probe style for |Z| Probes

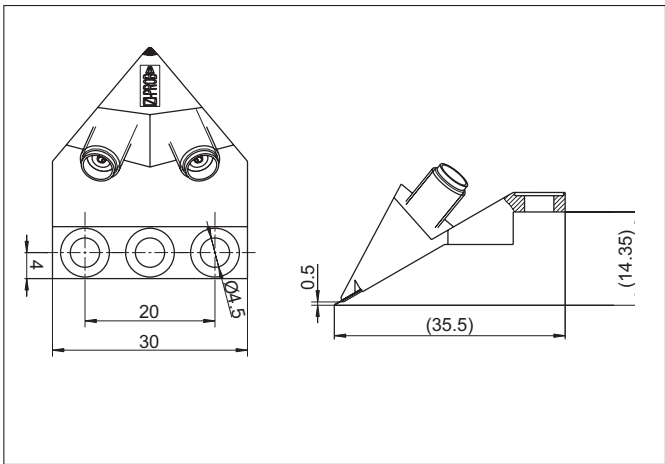

Probe style for Dual |Z| Probes

For more details, visit www.cascademicrotech.com/products/probes/

MULTI-CONTACT RF PROBES



InfinityQuad Probe

The first and only configurable multi-contact RF/mmW probe. For repeatable and precise engineering tests of DC, logic, RF and mmWave RFIC devices, the InfinityQuad probe ensures reliable measurement results up to 110 GHz over a wide temperature range (-40 to +125°C). The durable photo-lithographically defined fine-pitch tip structure enables probing of small pads down to 30 x 50 μm with minimum pad damage and consistent low contact resistance. The durable probe tips with small contact area of ~10 μm diameter ensure more than 250,000 touchdowns on Al pads and Au pads, and provide accurate X, Y and Z alignment.

For more details, visit www.cascademicrotech.com/products/probes/infinityquad


Features

- Customizable configuration up to 25 contacts: RF, Eye-Pass power, ground, logic
- Fine-pitch probe tips enables probing of pitches as small as 75 μm and 30 x 50 μm pads
- Low and repeatable contact resistance on aluminum pads (< 0.05 Ω) ensures accurate results
- Durable probe structure ensures more than 250,000 contacts
- Intuitive design capture tool ensures accurate design and fast product delivery



Specifications

- Number of contacts: From 4 to 25
- Number of 'Premium' channels: Up to 4 Premium channels (40, 50, 67 or 110 GHz)
- Available contact pitch: 75, 80, 100, 125, 150, 200 and 250 μm
- Tip material: Non-oxidizing nickel alloy tips
- Minimum pad size: 30 x 50 μm (see Pad layout rules for details)
- Contact area: 12 x 8 μm (nominal)
- Operating temperature: -40°C to +125°C (max. -55°C to +150°C)
- Contact life: > 250,000 cycles
- Recommended overtravel: 50 - 75 μm
- Maximum safe overtravel: > 250 μm
- Maximum DC current: 400 mA
- Maximum DC voltage: 50 V power bypass (100 V other)
- Series resistance (not including contact): < 2 Ω


Insertion loss

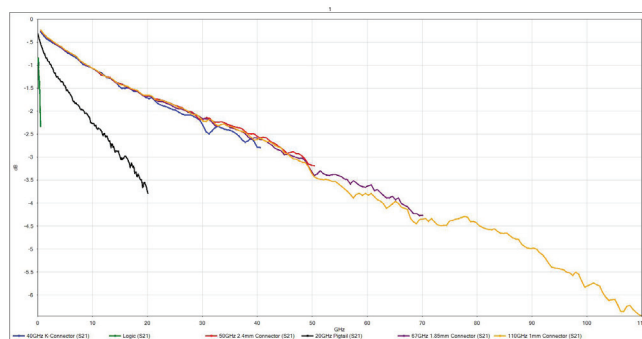

Return loss

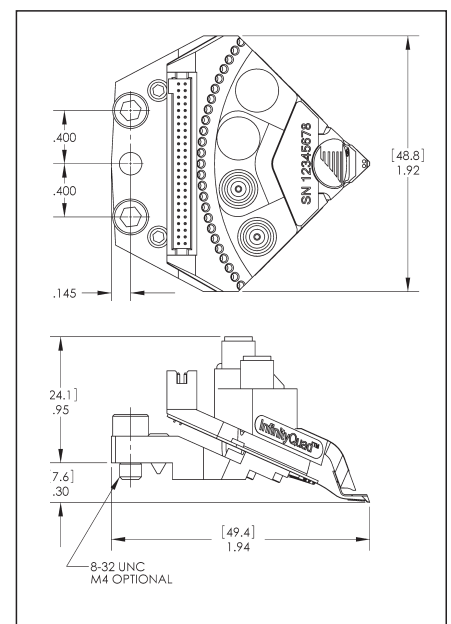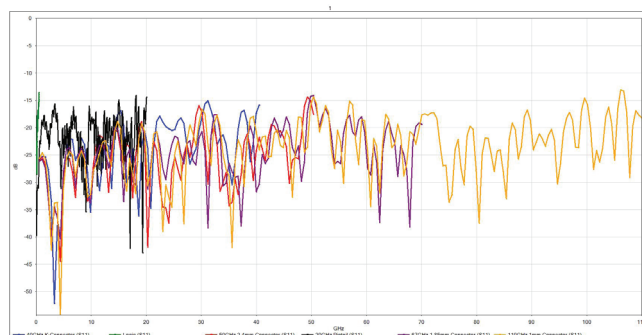

MULTI-CONTACT RF PROBES

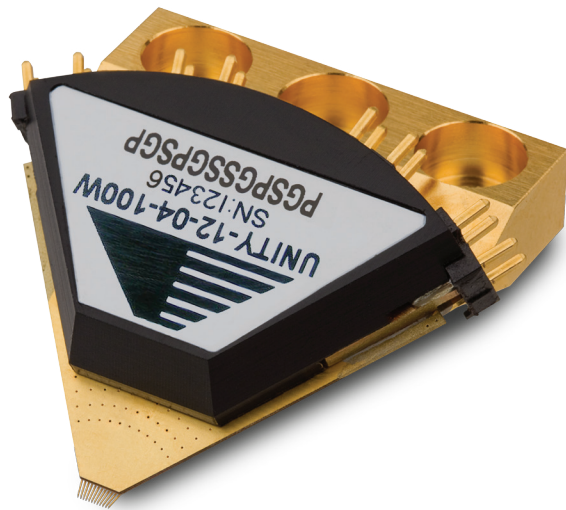

Unity Probe

The multi-contact Unity Probe provides highly flexible configurability, unprecedented durability and ease-of-use for RFIC engineering test. Unlike “bent-to-order” needle-probe solutions, Unity Probes are quickly “built to order” with a precision tip cluster featuring multiple independently compliant fingers to isolate chip components from probing stresses — maximizing probe life and durability. Each contact can be configured to one or several contact types and frequencies, and the Unity Probe delivers on the legendary quality you’ve come to expect from Cascade Microtech’s comprehensive suite of probing solutions.

Features

- Up to 12 contacts; any contact can be DC, Power, Logic to 500 MHz, or RF to 20 GHz
- Online design configuration tool helps you to specify your probe in minutes
- All designs are fully quadrant compatible
- Full solution includes probes, calibration substrates, stations, accessories and calibration software
- Scalable architecture for future needs

Electrical

- Maximum DC current: 1 A
- Maximum DC voltage: 50 V power bypass (>100 V other)
- Series resistance (not including contact): < 0.2 Ω
- R_c on aluminum at 25°C: < 0.1 Ω
- RF connector: Gore 100 series
- DC/Logic connector:
Two 0.025 inch square pins on 0.100 inch pitch
- Eye-Pass bypass inductance: 0.4 nH

Mechanical

- Number of contacts: 3 to 12 (Missing contacts count toward max.)
- Available contact pitch: 100 to 250 μm (25 μm steps)
- Tip material: Beryllium copper (BeCu) or tungsten (W)
- Contact area: 50 x 50 μm (nominal)
- Contact life > 250 k cycles on aluminum pads, > 500 k cycles on gold pads



Ordering Information

See Unity Probe product page at www.cascademicrotech.com to learn how to create a configuration code.


Optional cables available

P/N 147-295 SMA Female to square pin 8in. (20cm) flex cable
P/N 147-364 2.92mm Female to Gore 100 8in. (20cm) flex cable

Sample Configuration: P'PGXLG'PP'G

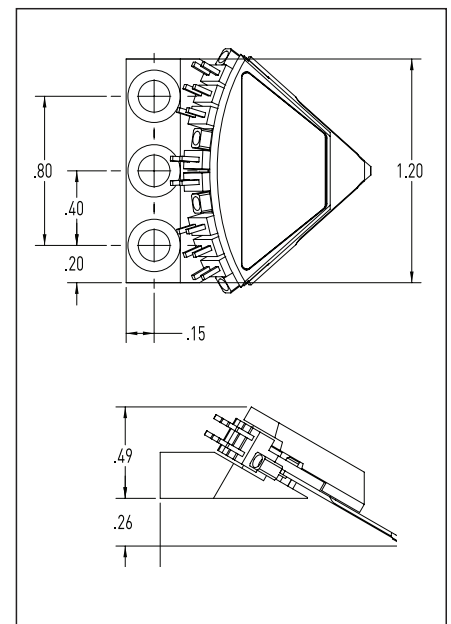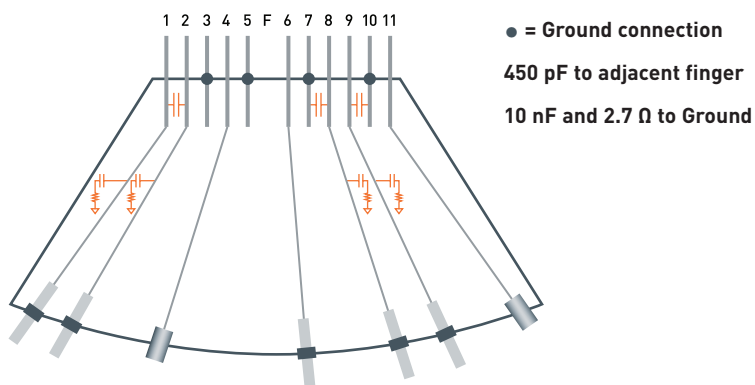

MULTI-CONTACT RF PROBES

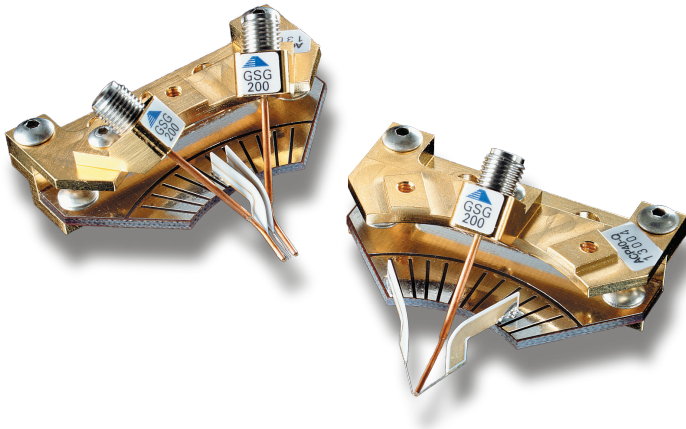

ACP Quadrant Probes

Quadrant Probes were developed in response to the need for multiple probe tips in a single module. Configurations consist of all RF or a combination of RF and DC.


The RF probes use Air Coplanar technology to produce a rugged microwave probe with a compliant tip for accurate, repeatable measurements on-wafer. The DC probes use ceramic blade needles for low noise and high performance.

Features

- Customized to customer application
- Mixture of DC and RF in one probe module. Up to 3 RF. Up to 8 DC.
- Utilizes ACP tip design, GSG, GS or SG
- RF tips available from DC to 100 GHz
- Choice of BeCu or tungsten tips
- DC needles come with a 100 pF capacitor to ground at the needle base
- Other values available upon request
- Power bypass inductance: 8 nH

Advantages

- Ideal for probing the entire circuit for functional test
- Dual ACP configuration supports differential signaling applications
- DC probes can provide power or slow logic to circuit under test

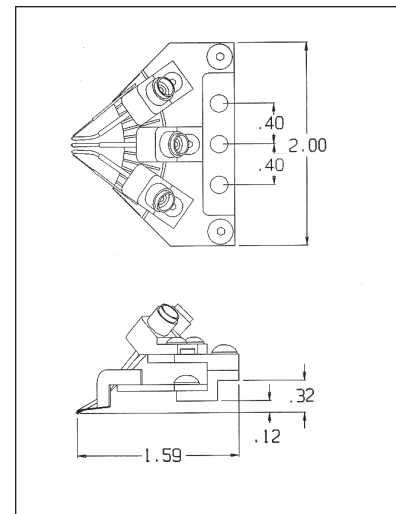

Probe style for: ACPyy-Q-1x, 2x & 30


Probe head type	Part number	Number of RF probes	Number of DC probes
ACP Quadrant Probe	ACPy-Q-11	1	1
	ACPy-Q-12	1	2
	ACPy-Q-13	1	3
	ACPy-Q-14	1	4
	ACPy-Q-15	1	5
	ACPy-Q-16	1	6
	ACPy-Q-17	1	7
	ACPy-Q-18	1	8
	ACPy-Q-21	2	1
	ACPy-Q-22	2	2
	ACPy-Q-23	2	3
	ACPy-Q-24	2	4
	ACPy-Q-30	3	0

Connector	Probe station	Cable
2.92 mm (f)	Summit 11K/12K, S300	132-423
	M150, RF-1, 9K, no MicroChamber	101-162B
2.4 mm (f)	Summit 11K/12K, S300	132-424
	M150, RF-1, 9K, no MicroChamber	102-202B
1.85 mm (f)	Summit 11K/12K, S300	132-425
	M150, RF-1, 9K, no MicroChamber	124-605B
1.0 mm (f)	Elite300	147-316

Notes:

1. yy refers to the connector type: 40 [2.92 mm], 50 [2.4 mm], 65 [1.85 mm], 110 [1.0 mm].
2. Use ACP Quadrant form to specify number of RF-probes, DC probes, pitch, tip material (BeCu or tungsten) and layout configuration.
3. ACP110-Q-2x or ACP110-Q-3x require a minimum pitch of 1200 μm .
4. A design capture form is available online to help with configuring and specifying the probe.

|Z| PROBES

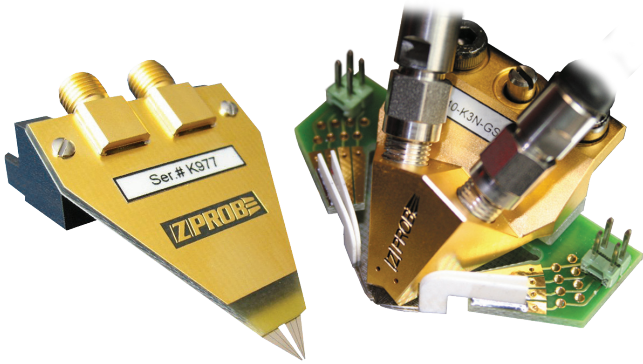


|Z| Probes for Mixed-Signal Applications

Accurate multi-contact probes with long life time for multiport and digital signal testing
Based on the durable |Z| Probe design, Multi |Z| Probes and ProbeWedge series allow up to 35 mixed-signal contacts on one probe, with optional on-board components. The Multi |Z| Probe can also be integrated into the |Z| Probe Card for high-throughput RF testing.

Features

- Mix DC and RF/Microwave contacts
- Long lifetime (typically > 1,000,000 touchdowns)
- Excellent performance in temperatures ranging from 10 K to 200°C
- Probe on any pad material with minimal damage


Probe Type	Frequency	Configurable	Non-Uniform Pitch	Number of Contacts
Multi Z Probe	DC – 25 GHz	No	Yes	Up to 35 contacts
HF ProbeWedge	DC – 67 GHz	No	Yes	Up to 12 contacts
ProbeWedge WE	DC – 20 GHz	No	Yes	Up to 16 contacts
ProbeWedge WD	DC – 20 GHz	No	Yes	Up to 40 contacts

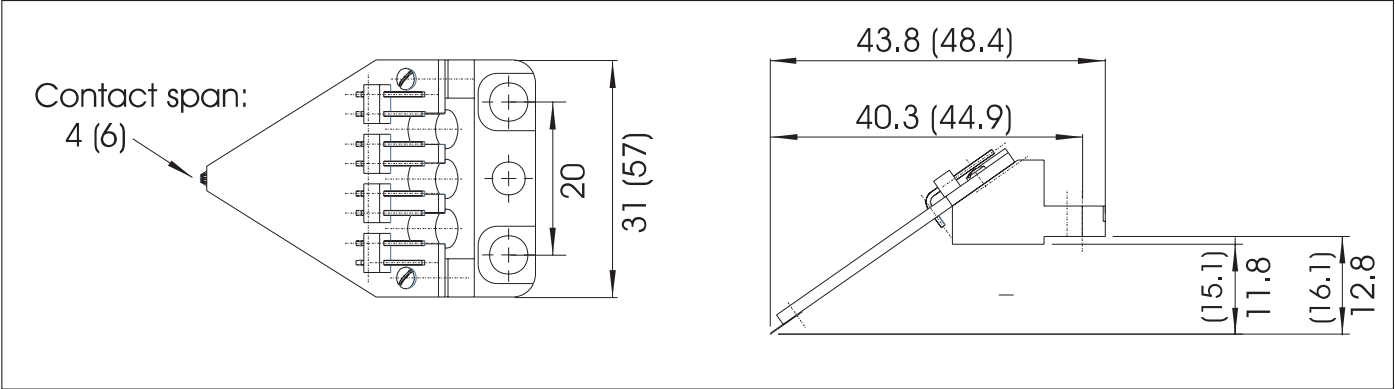

Multi |Z| Probe 3 to 7 pins with medium board size.
Variational figures for Multi |Z| Probe 7 to 25 pins with large board size in brackets.

For more details, visit www.cascademicrotech.com/products/probes/

MULTI-CONTACT DC PROBES

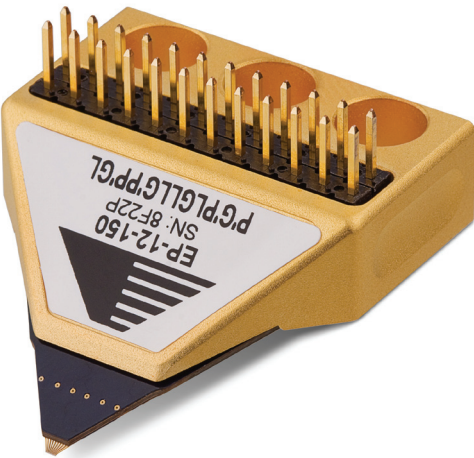

Eye-Pass Probe

The Eye-Pass multi-contact DC probe is designed to provide a multitude of simultaneous connections to a wafer or similar devices. The connections may be ground, logic/signal, standard power and Eye-Pass power. For power-supply connections, Eye-Pass high-performance power-bypass technology delivers low impedance and resonance-free power connections over an extremely wide frequency range. Used with ACP-series probes and/or multi-contact RF Unity Probes, Eye-Pass probes provide functional at-speed testing for Known-Good-Die. Customized for the user-selected footprint that best suits your application, Eye-Pass probes feature up to 12 contacts per probe head, precisely aligned in a highly durable precision tip cluster to provide high compliance.

Features

- High-performance power bypassing for low-impedance and oscillation-free testing to more than 20 GHz
- Mix multiple contact types: Ground, Power (Standard or Eye-Pass), Logic/Signal
- Low and repeatable contact resistance on aluminum pads (< 0.25 Ω on Al, < 0.01 Ω on Au)
- Long probe life with more than 250 k cycles for moderate volume production test

Electrical

- Maximum DC current: 1 A
- Maximum DC voltage: 50 V power bypass (>100 V other)
- Series resistance: < 1 Ω (not including Rc)
- Connector: 2 x12 square pin header (ground row furthest from tip), Direct mapping of connector pins to contacts (no custom routing)
- Eye-Pass bypass inductance: 0.4 nH

Mechanical

- Number of contacts: 2 to 12 (Missing contacts count toward max.)
- Available contact pitch: 100 to 250 μm uniform spacing
- Tip material Beryllium copper (BeCu) for gold pads (Au) or tungsten (W)
- Contact area: 50 μm x 50 μm (nominal)
- Contact life > 250 k cycles on aluminum pads, > 500 k cycles on gold pads


Ordering Information

See Eye-Pass Probe Design Capture page on Eye-Pass probe page at www.cascademicrotech.com to learn how to create a configuration code.

Optional cables available


P/N 124-082 BNC Male to 2 pin Molex connector cable, 4ft length (single channel)

Sample Configuration: P'PGXLG'PP'G

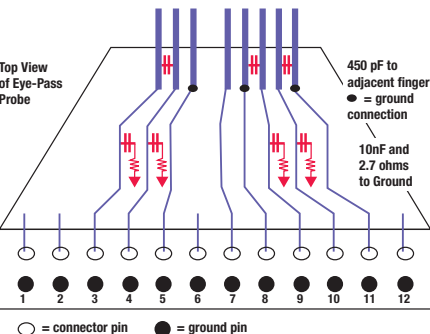

Conn Pin number	Contact	Type
1		No Contact
2		No Contact
3	P	Eye-Pass Power**
4	P	Eye-Pass Power
5	G	Ground
6	X	No Contact
7	L	Logic/Signal
8	G	Ground
9	P	Eye-Pass Power
10	P	Eye-Pass Power
11	G	Ground
12		No Contact

**Adjacent ground recommended for best Eye-Pass Power performance

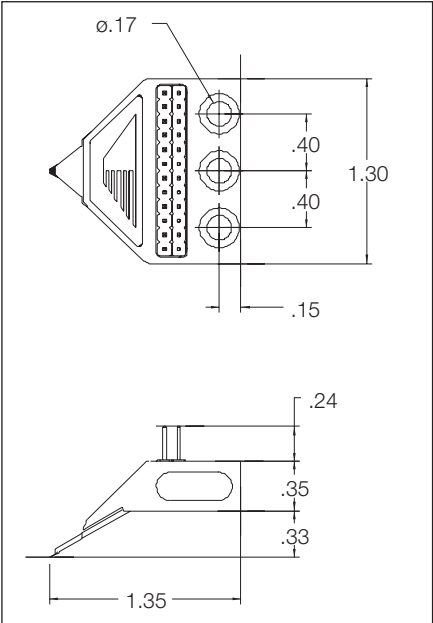

MULTI-CONTACT DC PROBES

Multiple configurations for functional circuit testing

The DCQ probes use controlled impedance, ceramic blade needles for low noise and high performance. This needle style allows the placement of high quality bypass capacitors with very little series inductance due to their close proximity to the probe tip. All of the needles are connected to a common ground plane but individual needles can be easily (ground) isolated for additional low noise performance. A maximum of 16 needles are available.

The WPH probes feature up to 12 ceramic-bladed, nickel-plated, tungsten needles with a 2 x 12 square pin cable interface. The circuit board has been laid out such that both series and shunt components can be added to the signal path of each needle.


Features

- Customized to customer application
- Up to 16 DC
- Standard DCQ probes have flat tip needles available in nickel-plated tungsten or BeCu with diameters of 0.75 mil, 1.0 mil and 1.5 mil. WPH probes have full-radius, nickel-plated tungsten needles.
- Supports collinear and non-standard needle configurations
- Power bypass inductance: DCQ 8 nH, WPH 16 nH


Advantages

- Ideal for probing the entire circuit for functional test
- DC probes can provide power or slow logic to circuit under test

Probe head type	Part number (yy= number of DC probes)	Max. number of DC probes	MicroChamber compatible	Connector
DCQ Quadrant probe (Note 1)	DCQ-yy	16	Yes (Note 6)	DCQ DC connections are supplied via a wire pig-tail to square pin header, standard. (Note 3)
WPH needle probe heads (Note 3)	WPH-9yy-xxx (Note 4) WPH-9yy-NS (Note 5)	12 12	No No	Circuit board mounted square-pin header, standard.

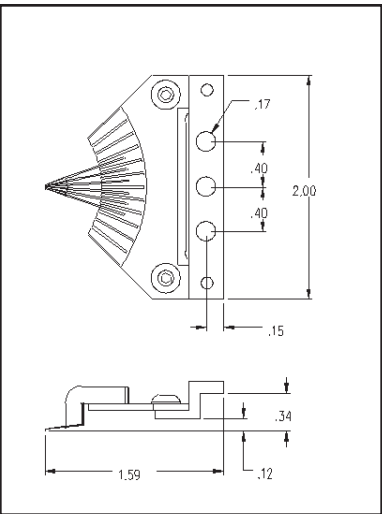

Probe style for: DCQ-YY

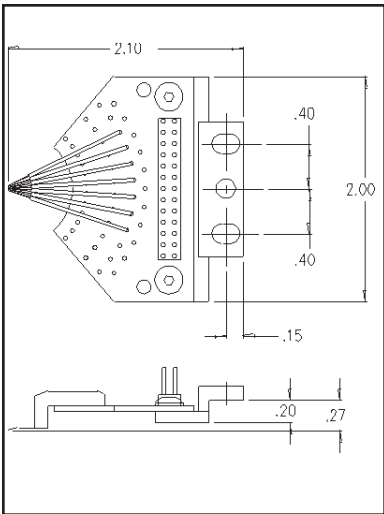

Probe style for: WPH-9YY


Notes:

1. Use Quadrant Probe Design Capture Form to specify number of DC needles and layout of DC lines.
2. Custom cable harnesses are also available.
3. See app. note "Layout Rules for WPH-900 Series Probes"
4. The -xxx suffix indicates probe contact center-to-center spacing (pitch) in microns, e.g. WPH-908-150 has 8 needles with a spacing of 150 μ m (5.91 mils). Needles are in a collinear pattern with constant pitch.
5. Needles may be in a non-standard pattern to be specified by the customer.
6. MicroChamber compatibility up to 12 needles.

BOARD TEST AND SIGNAL INTEGRITY PROBES

Fixed-Pitch Compliant Probe (FPC)

The FPC-Series (Fixed-Pitch Compliant) is a high-frequency 50 Ω coaxial probe that offers a signal line with either one or two low-inductance fixed-pitch ground contacts. The probe tip structure is lithographically defined for unsurpassed impedance control, preserving the highest integrity possible when launching and receiving signals from SMT boards, hybrids and multi-chip modules (MCM).

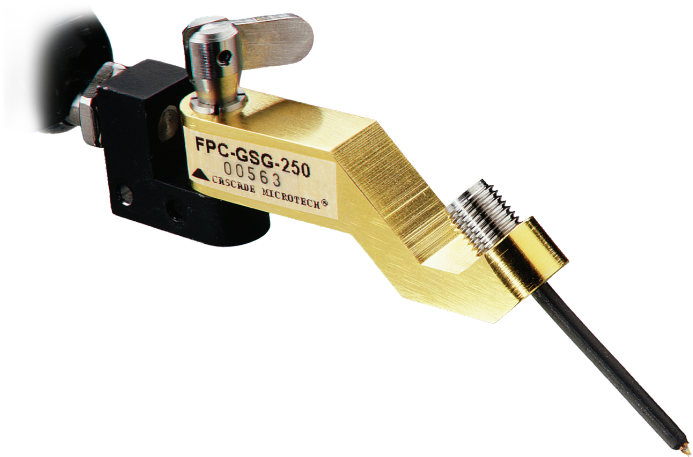


Features

- DC to 40 GHz bandwidth
- 10 ps rise time
- Low insertion and return loss
- 2 mils of tip-to-tip compliance
- High probing angle and clearance
- High-power handling capability

Advantages

- Maintains 50 Ω environment which allows accurate high-frequency measurement of microelectronic modules
- Compliant tips allow probing of non-planar structures
- BeCu tips provide longer probing life and reduce probe damage
- Access contacts close to components, module walls, or other obstructions

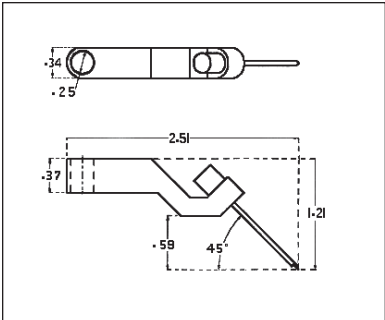


Probe style for: FPC

Probe head type	Part number (Notes 1,2,3)	Insertion loss, typical	Return loss min.	Connector & tip type	Recommended cable	Recommended ISS	
						standard (100 to 250 μm)	Wide pitch (250 to 1250 μm)
DC-40 GHz (Note 4, 5)	FPC-GS-xxx	2.0 dB	10 dB	BeCu.	124-084-B	103-726	106-683
	FPC-SG-xxx	2.0 dB		2.92 mm (f)		103-726	106-683
	FPC-GSG-xxx	1.0 dB				101-190	106-682
DC-40 GHz (Note 4, 5)	FPC-W-GS-xxx	2.0 dB	10 dB	Tungsten	124-084-B	103-726	106-683
	FPC-W-SG-xxx	2.0 dB		2.92 mm (f)		103-726	106-683
	FPC-W-GSG-xxx	1.0 dB				101-190	106-682

Notes:

1. The -xxx suffix indicates probe contact center-to-center spacing (pitch) in microns, e.g. FPC40-SG-150 is 150 μm (5.91 mils). Contacts are on a constant pitch and width is approximately 50 μm.
2. The convention for describing probe head footprints is the sequence of contacts as seen looking down on the probe head tip in its functional position, with the tip pointing away from the viewer, describing contacts from left to right.
3. FPC standard pitches are 100, 125, 150, 200, 250, 350, 500, 650, 750, 1000 and 1250 μm. Non-standard pitches are available from 100 μm to 1250 μm and by special order to 3000 μm. Insertion loss applies to standard pitch range. Other pitches may have increased insertion loss. Adapter 106-835 is required for Summit Series positioners.
4. FPC GSG probes: 40 GHz up to 250 μm pitch, 20 GHz up to 1250 μm pitch and 3 GHz up to 3000 μm pitch.
FPC GS/SG probes: 40 GHz up to 250 μm pitch, 18 GHz up to 500 μm pitch, 10 GHz up to 1250 μm pitch and 3 GHz up to 3000 μm pitch.
5. FPC probes are not designed for use with MicroChamber probing stations.
6. Use the standard RF mount to FP adapter (P/N 104-913).

SPECIAL PURPOSE PROBES

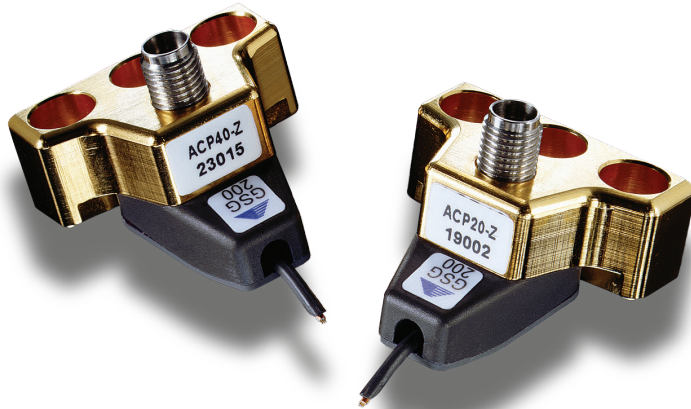

Impedance Matching Probe

Cascade Microtech's Impedance Matching Probes, using proven Air Coplanar Probe technology, are available in both reactive and resistive versions. A choice of either ACP or FPC body styles is available.


Reactive matching probes provide low-loss transitions such as to the low impedance outputs of power devices. Resistive matching probes are frequently used to singly terminate the patch to a low dynamic resistance laser diode for maximally flat modulation frequency response.

Features


- Choice of reactive or resistive probe
- Choice of center frequency range, value and bandwidth
- Choice of probe tip impedance
- Choice of body styles, ACP or FPC

Advantages


- Improved load-pull measurement tuning range
- Ability to make accurate on-wafer measurement of low-impedance power devices
- Stabilize oscillations in high-gain devices
- Impedance match to low dynamic resistance laser diodes
- Custom configured for your application

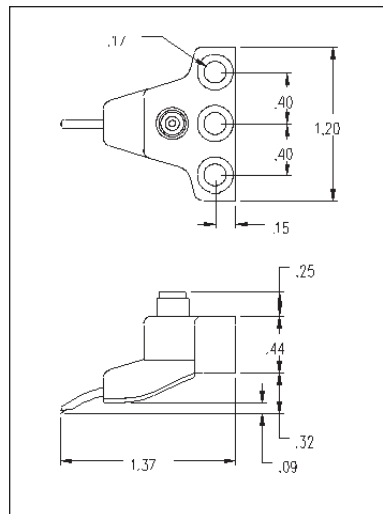

Probe style for: ACP20-Z, ACP40-Z and ACP-R

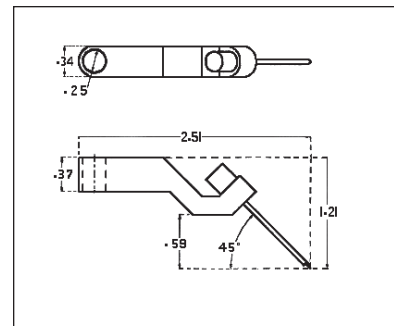

Probe style for: FPC-R

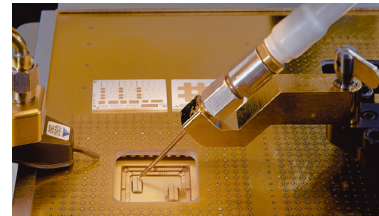

Probe head type	Part number (Note 1, 2, 3)	Center frequency	Bandwidth (GHz)	Connector & tip type	Impedance range (Ω)	MicroChamber compatible
Reactive Probe (Note 4)	ACP20-Z-GSG-xxx	0.85 to 20 GHz	< 10% Std. 10% to 20% optional	BeCu 2.92 mm (f)	24 to 50 Std. 10 to 24 optional	Yes
	ACP40-Z-GSG-xxx	20 to 40 GHz				
Resistive Probe (Note 4)	ACP-R-GS-xxx	0 to 10	0 to 10	BeCu 2.92 mm (f)	45 \pm 5% Std. 10 to 300 optional	Yes
	ACP-R-SG-xxx					
	ACP-R-GSG-xxx					
Resistive Probe (Note 4)	FPC-R-GS-xxx	0 to 10	0 to 10	BeCu 2.92 mm (f)	45 \pm 5% Std. 10 to 300 optional	No
	FPC-R-SG-xxx					
	FPC-R-GSG-xxx					

Recommended cable: 132-420 for Summit 11K/12K, and S300 probe stations; 101-162-B for M150, RF-1 and 9K non-MicroChamber stations


Notes:

1. The -xxx suffix indicates probe contact center-to-center spacing (pitch) in microns, e.g. ACP40-Z-GSG-150 is 150 μ m (5.91 mils). Contacts are on a constant pitch and width is approximately 50 μ m.
2. The convention for describing probe head footprints is the sequence of contacts as seen looking down on the probe head tip in its functional position, with the tip pointing away from the viewer, describing contacts from left to right.
3. ACP pitches are available from 50 μ m to 1250 μ m.
4. Use Impedance Matching Probe Order Form to specify center frequency, tip impedance, bandwidth, resistance value and pitch.

SPECIAL PURPOSE PROBES

40/80 Gb/s High-Performance Quadrant Probe


Designed to provide wide bandwidth RF connections and simultaneous resonant free power bypass connections for the special needs of high-speed mixed-mode IC for optical networks.

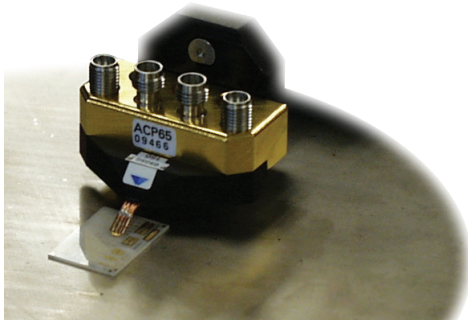

- Low RF loss and excellent impedance control over very wide bandwidth
- High performance resonance free bypass for low impedance power supplies
- Allows on-wafer evaluation of high performance digital circuits
- Minimal distortion of high-speed digital signals
- Maximized eye diagram test performance at wafer test
- Durable Air Coplanar tip technology for long contact life

Cryogenic Probe

Designed to provide superior mechanical properties at cryogenic temperatures while maintaining solid RF measurement performance.

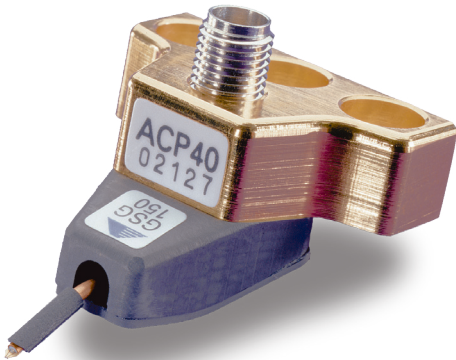


- Functional temperature range of -263 to +150°C
- Stainless steel tip material for thermal decoupling
- Coaxial cable with TCE matched inner and outer conductors
- Consistent tip geometry even at cryogenic temperatures

SUPPORTING ACCESSORIES

Impedance Standard Substrates

Cascade Microtech's family of Impedance Standard Substrates (ISS) support all of your high-frequency probing applications. Using them ensures greater accuracy and better repeatability in on-wafer calibration of vector network analyzers. Only Cascade Microtech offers the proven accuracy of LRRM calibrations with automatic load inductance compensation.

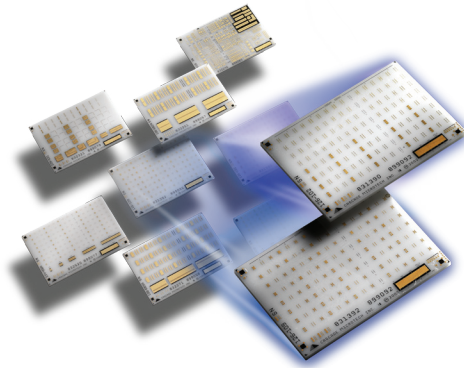

Ordering Information

Part number	Description	Cal sites	Pitch μm
005-016	General purpose	Cal sites vary	
101-190	LRM	27 GSG	100 to 250
103-726	GS	27 GS or SG	100 to 250
104-783	W-band	27 GSG	75 to 150
104-909	Narrow pitch	13 GSG, 7 GS, 7 SG	50 to 150
106-682	Wide pitch GSG	8 GSG	250 to 1250
106-683	Wide pitch GS/SG	8 GS, 8 SG	250 to 1250
106-686	GP membrane	25 loads	80 to 3000
108-010	Very wide pitch GSG	4 GSG	150 to 3000
108-011	Very wide pitch GS/SG	4 GS, 4 SG	150 to 3000
109-531	Right angle	5 N-E, 5 N-W, 5 E-W	100 to 500
114-456	ACP-RC	27 GSG	100 to 150
126-102	Dual/Differential	17 GSGSG, SGS, SGSG, GSGS	150
129-239	Dual/Differential	17 GSGSG, SGS, SGSG, GSGS	100 to 125
129-240	Dual/Differential	17 GSGSG, SGS, SGSG, GSGS	150 to 225
129-241	Dual/Differential	10 GSGSG, SGS, SGSG, GSGS	250
129-246	Dual/Differential	18 GSSG, SSG, GSS	100 to 150
129-247	Dual/Differential	18 GSSG, SSG, GSS	175 to 250
129-248 ¹	General purpose thru	Qty four each, straight, cross, loop back thrus	GSGSG (300 to 650) GSSG (300 to 950)
129-249 ¹	General purpose thru	Qty four each, straight, cross, loop back thrus	GSGSG (700 to 1250) ² GSSG (1000 to 1250) ²
138-356	Waveguide Infinity Probe	15 GSG for 50 μm 15 GSG for 75 μm	GSG 50 to 75
138-357	Waveguide Infinity Probe	9 GSG for 100 μm 9 GSG for 125 μm 12 GSG for 150 μm	GSG 100 to 150

Notes:

- Requires p/n 106-682 (GSGSG) or 106-683 (GSSG) ISS for wide pitch differential/multiport applications
- Qty 2 each for pitches 1000-1250 μm

Cables

Cascade Microtech's range of low-loss, thermally-stable cables ensure higher-quality measurements and longer-lasting calibrations. Each cable has a male connector at one end that connects to the probe and a female connector at the other end to connect to the test instrumentation. For vertical style probes, the male connector includes an integrated 90° elbow.

Cables for Use with Infinity and ACP Probes

Freq (GHz)	Probe station	Body style	Length (inch)	Part number
DC to 40	Summit 11K/12K, S300	A	48 inch	132-423
		V	48 inch	132-420
	M150, RF-1,9K, no MicroChamber	A	48 inch	124-084-B
		V	48 inch	101-162-B
DC to 50	Summit 11K/12K, S300	A	48 inch	132-424
		V	48 inch	132-421
	M150, RF-1,9K, no MicroChamber	A	48 inch	124-085-B
		V	48 inch	103-202-B
DC to 67	Summit 11K/12K, S300	A	36 inch	132-425
		V	36 inch	133-422
	M150, RF-1,9K, no MicroChamber	A	36 inch	124-606-B
		V	36 inch	124-605-B
DC to 110	Summit 11K/12K, S300	A, V	18 cm	132-458
	Elite300	A, V	24 cm	147-316


'A' denotes 45° angled coaxial connector body style.

'V' denotes vertical coaxial connector body style.

NB: Dual Infinity probe is "V" style only.


For Waveguide sections consult factory.

SUPPORTING SOFTWARE

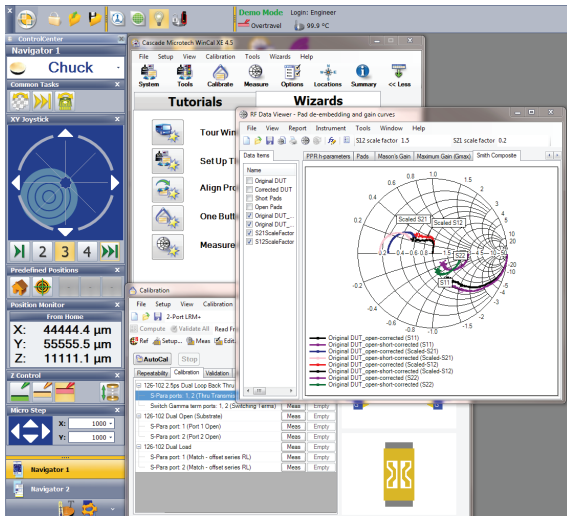

Easy, fast, and accurate RF measurement

WinCal XE's guided and smart system setup and customizable Wizards ensure a correct system setup, reliable VNA calibration, and repeatable data.

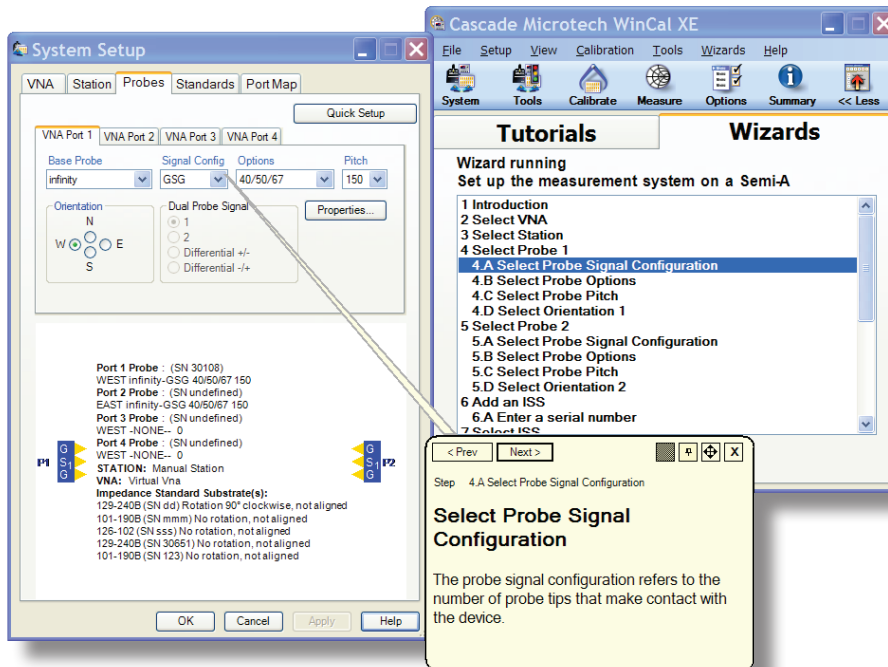

Key Features:



- Automatic VNA calibration using calibration method of your choice
- Extensive guidance for correct system setup and calibration
- Convert S-parameters to a device appropriate format
- Customizable display templates and Wizards that adapt to your need
- Powerful measurement sequencing capabilities
- LRRM-SOLR hybrid 4-port calibrations for precision 4-port calibrations
- Error Set Manager provides error set augmentation and error set comparison tools
- Multi-line TRL cal to compare your preferred calibration methods to a NIST-style calibration

Accurate on-wafer S-parameter measurements up to 500 GHz and beyond

The WinCal XE software accurately calibrates the measurement system and automates measurements, data collection and data transformation, providing repeatable and precise S-parameter data. The WinCal XE 4.5 version is fully compatible with IZI Probe, ACP probe and Infinity Probe families and supports both ISS and CSR calibration substrates. It is also compatible with ProberBench™ and Nucleus™ probe station software, and most commercially available Vector Network Analyzers.

Advanced capability for both present and the future

WinCal XE easily converts S-parameters to a device appropriate format, and also enables immediate and live data reduction and viewing. WinCal XE also provides the broadest range of VNA calibration choices up to 4 ports.

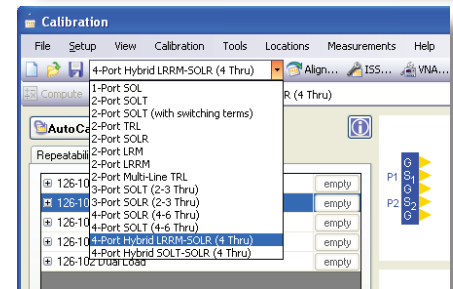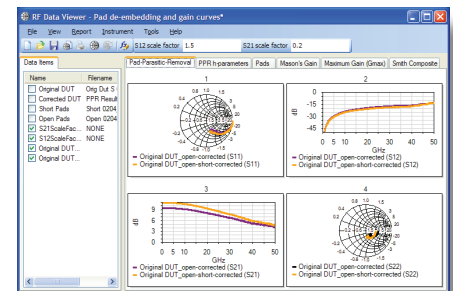

Ordering information:

Part number	Description
142-171	WinCal XE, full version (USB)
142-173	WinCal XE, 30-day demo (USB)
142-178	WinCal XE, field upgrade (from demo to full version)

Cascade Microtech, Inc.
Corporate Headquarters
toll free: +1-800-550-3279
phone: +1-503-601-1000
email: cmi_sales@cmicro.com

Germany
phone: +49-89-9090195-0
email: cmg_sales@cmicro.com

Japan
phone: +81-3-5615-5150
email: cmj_sales@cmicro.com

China
phone: +86-21-3330-3188
email: cmc_sales@cmicro.com

Singapore
phone: +65-6873-7482
email: cms_sales@cmicro.com

Taiwan
phone: +886-3-5722810
email: cmt_sales@cmicro.com